


Hi guys,


Today I want to talk to you about how to dictate both WSJT-X and MSHV to ensure that at the end of a qso in FT8 or FT4, the qso data is transferred to EasyLog without having to do it manually, by copying the qso data or by exporting the log from the aforementioned programs and then importing them into EasyLog.

Let's start by saying that in EasyLog you have to enable the reception of data and this is done by going to the tab called WSJT-JTDX at the top and putting the flag in the box to the left of the wording! Activate data reception from WSJT-JTDX”:

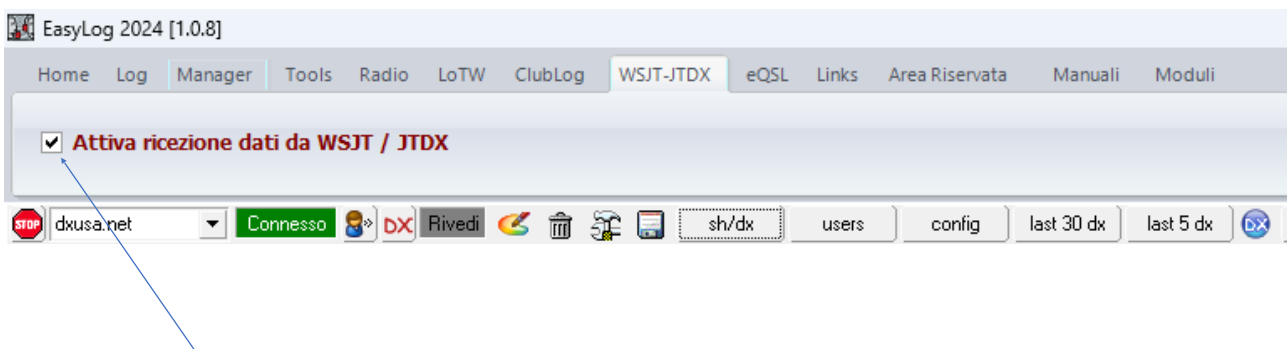


At this point we go first to WSJT-X.


Let's go to File/Settings:

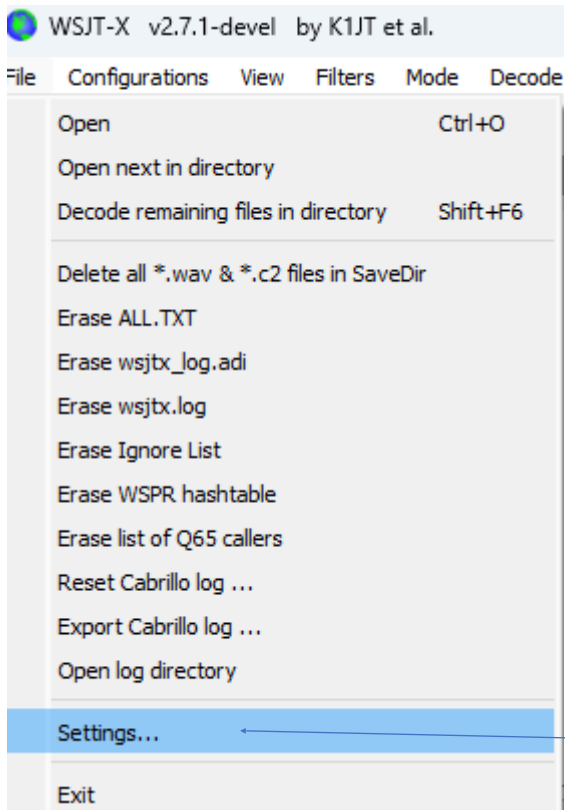


We will find ourselves with this screen:

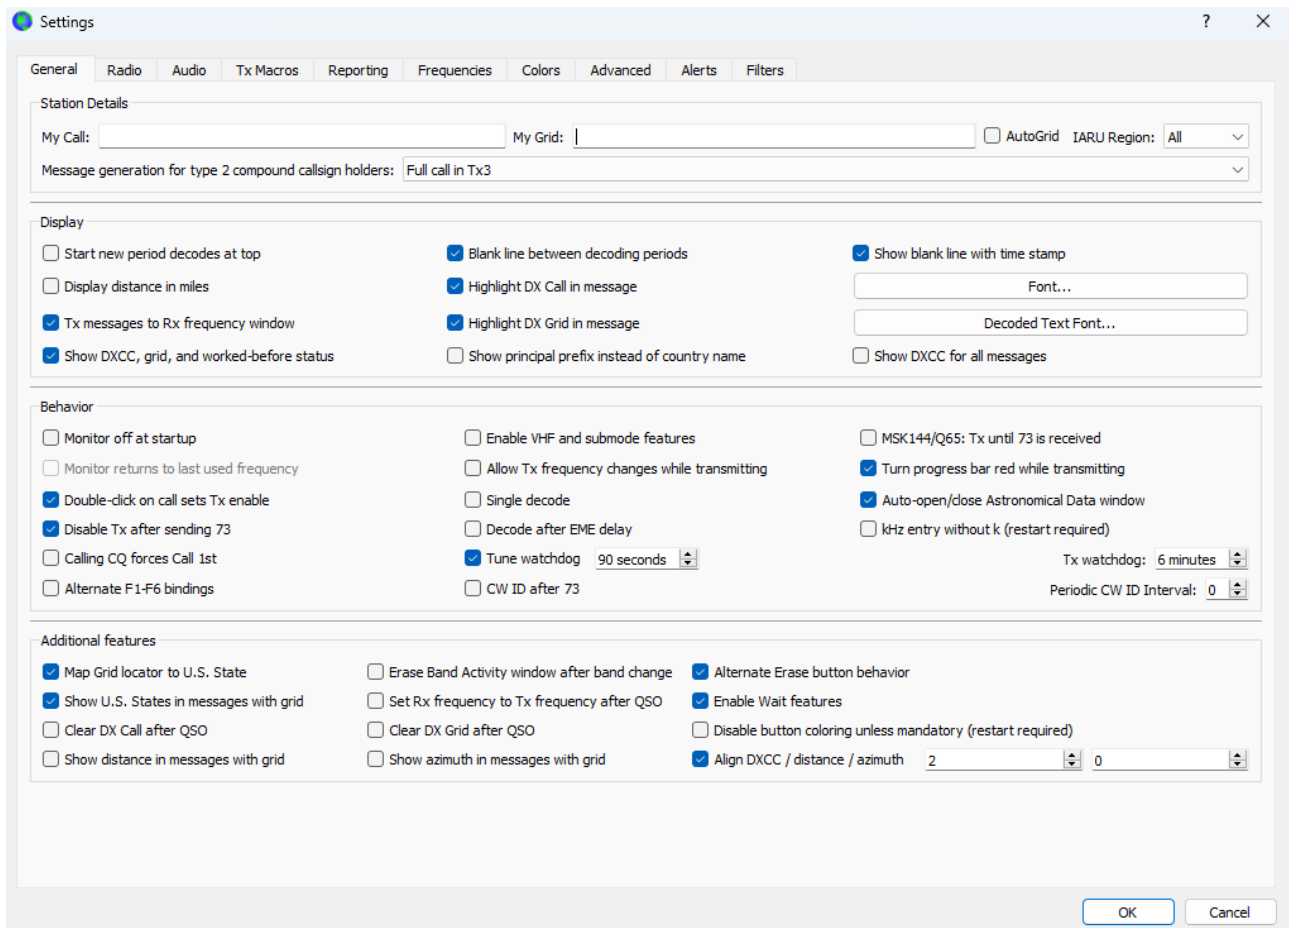


Now click on the "Report" tab:

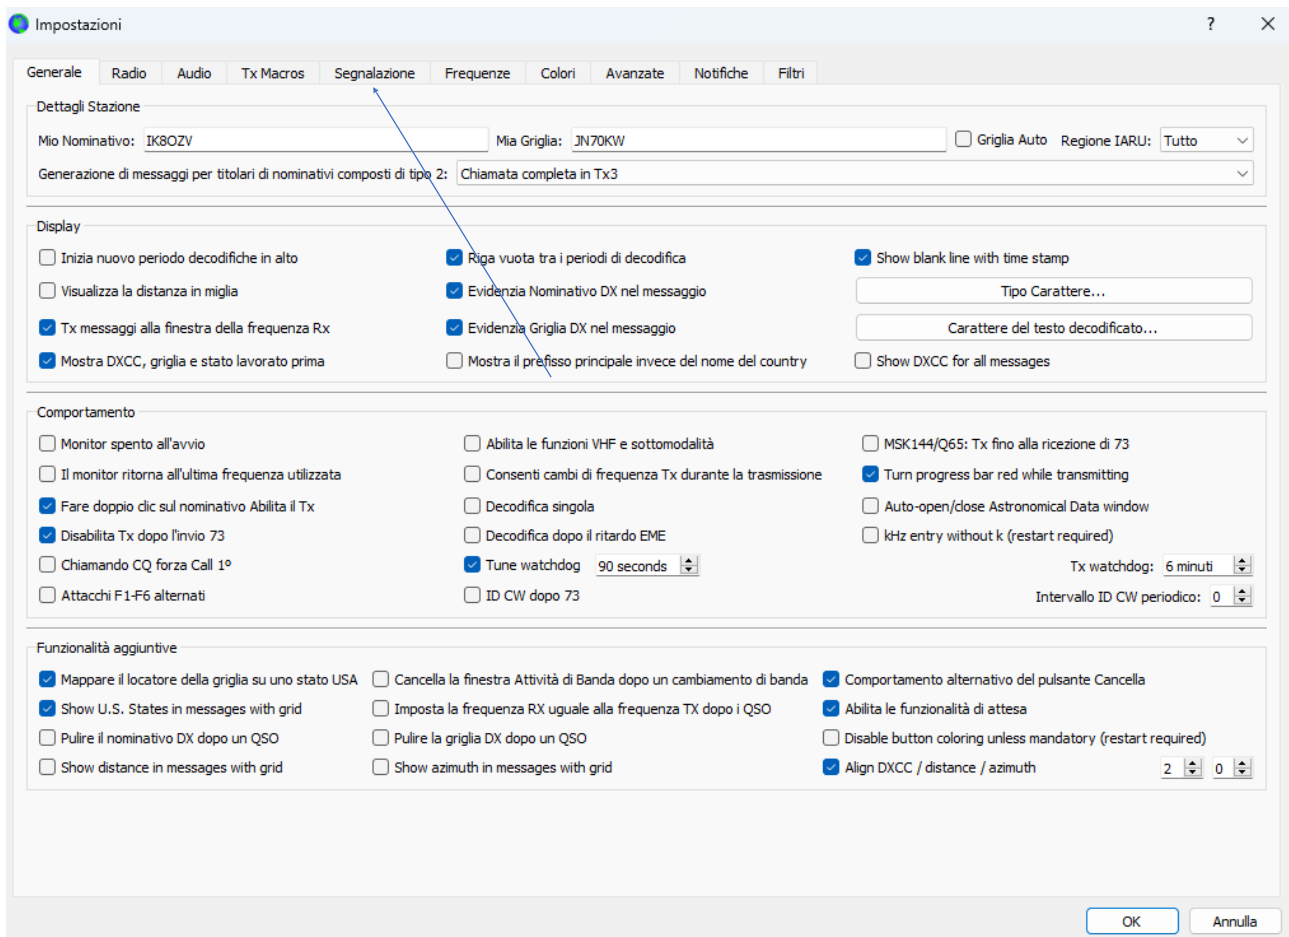


And we will find ourselves with this other screen that is the one that interests us:

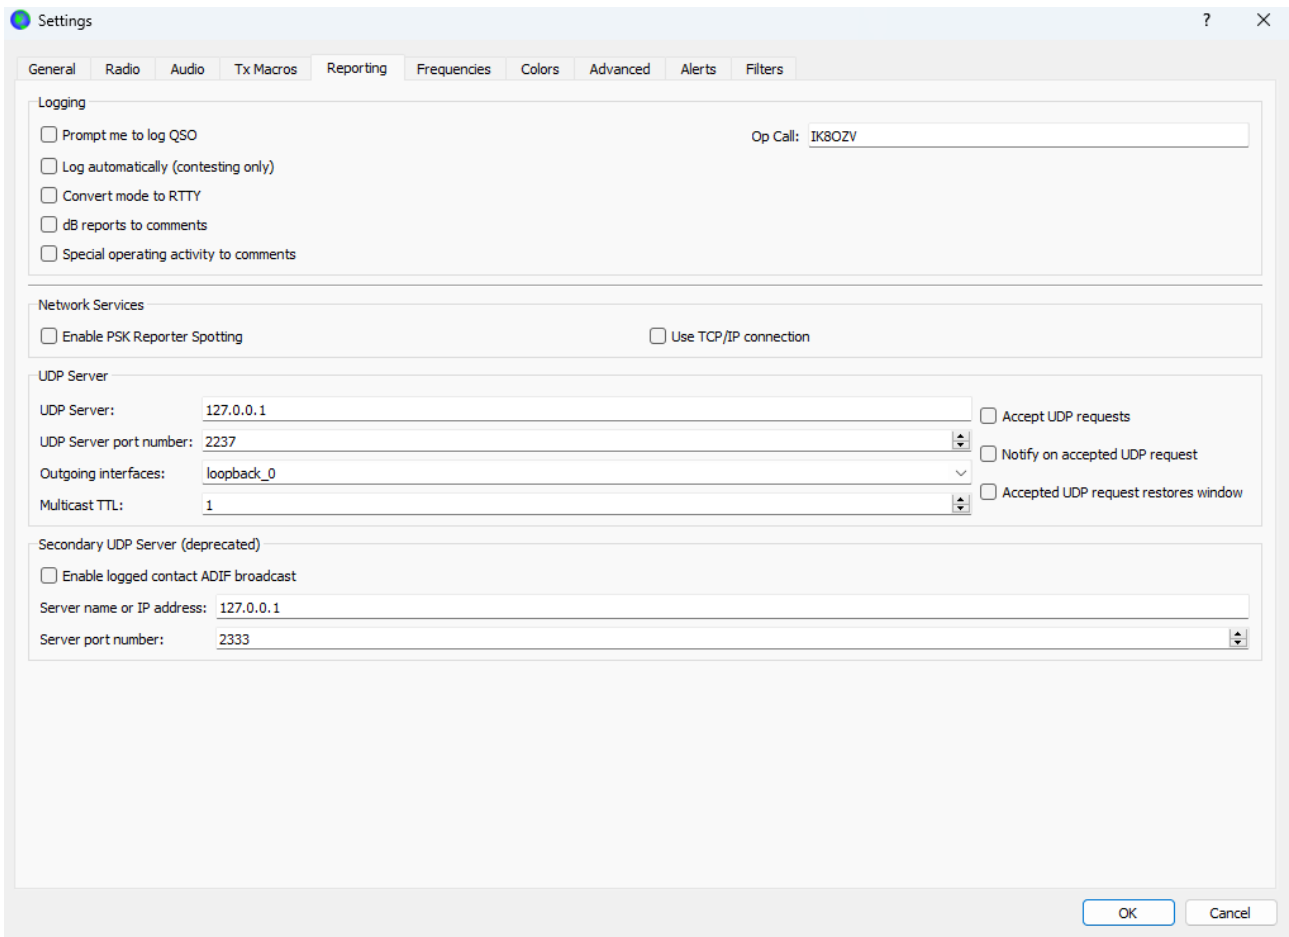


Now enter your name here:

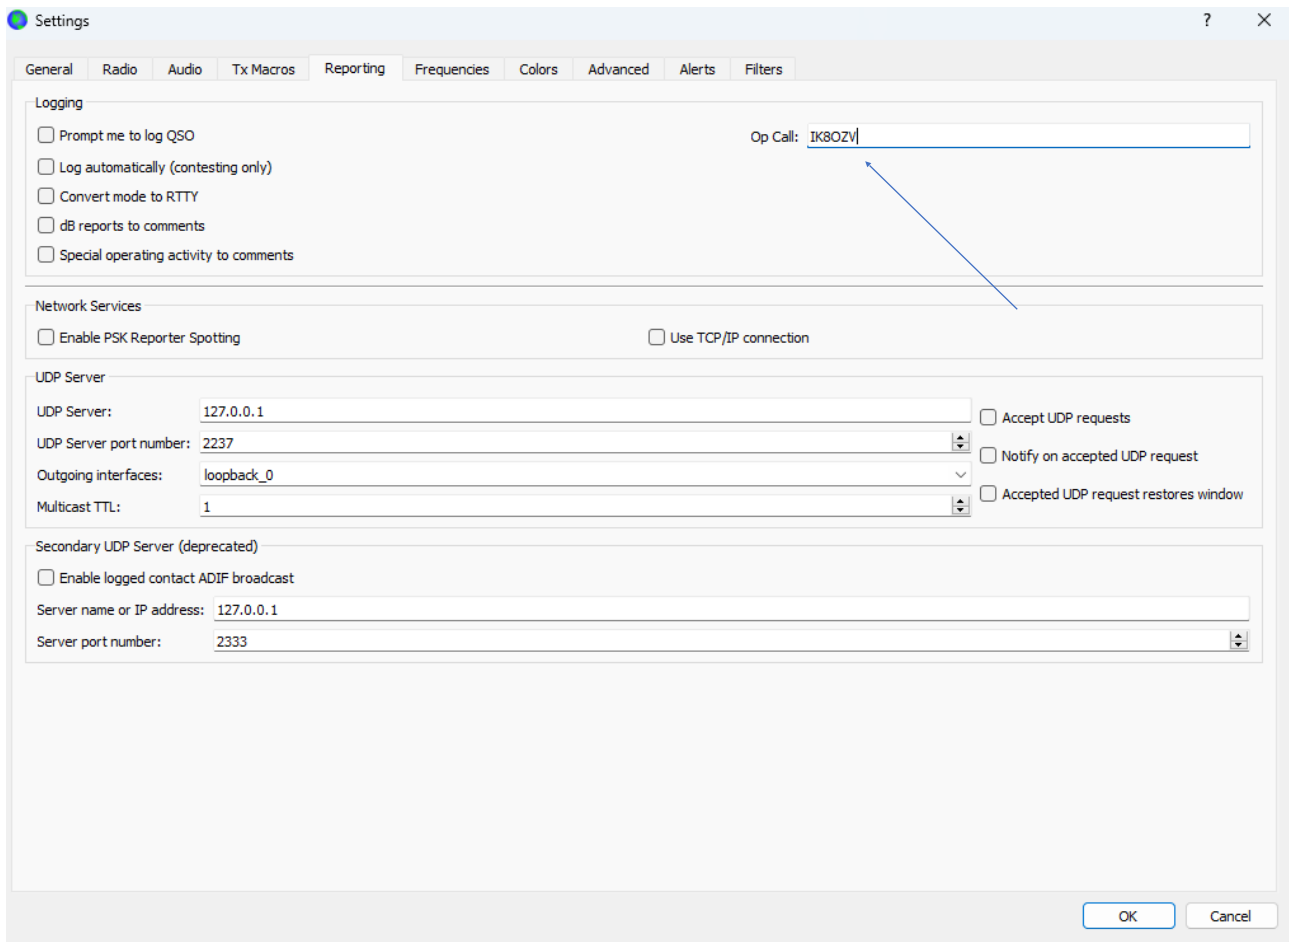


And put the tick in this box:

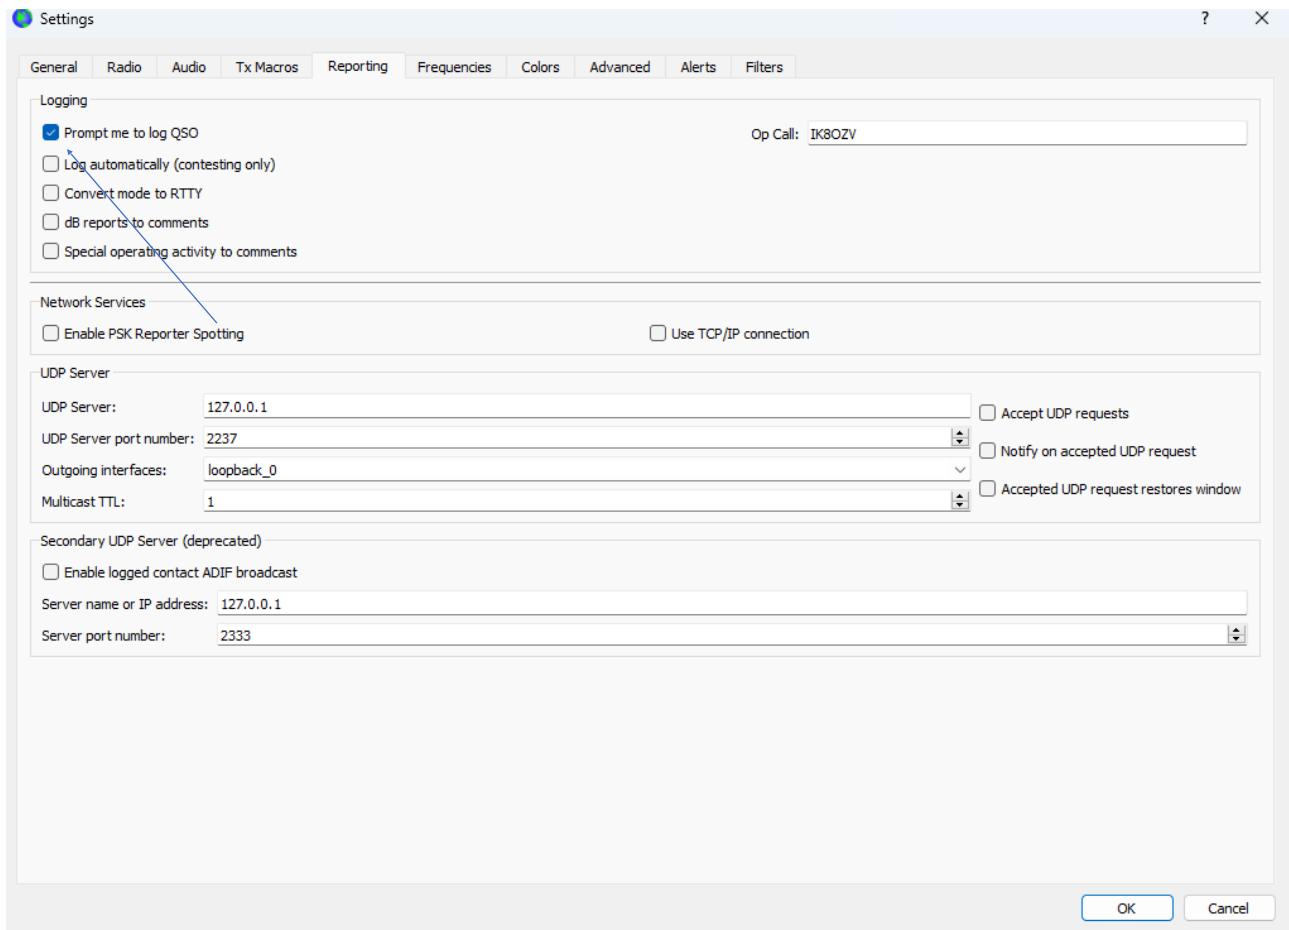


If you prefer the signal reports to be transmitted in the notes field, put the tick in this box otherwise leave it empty:

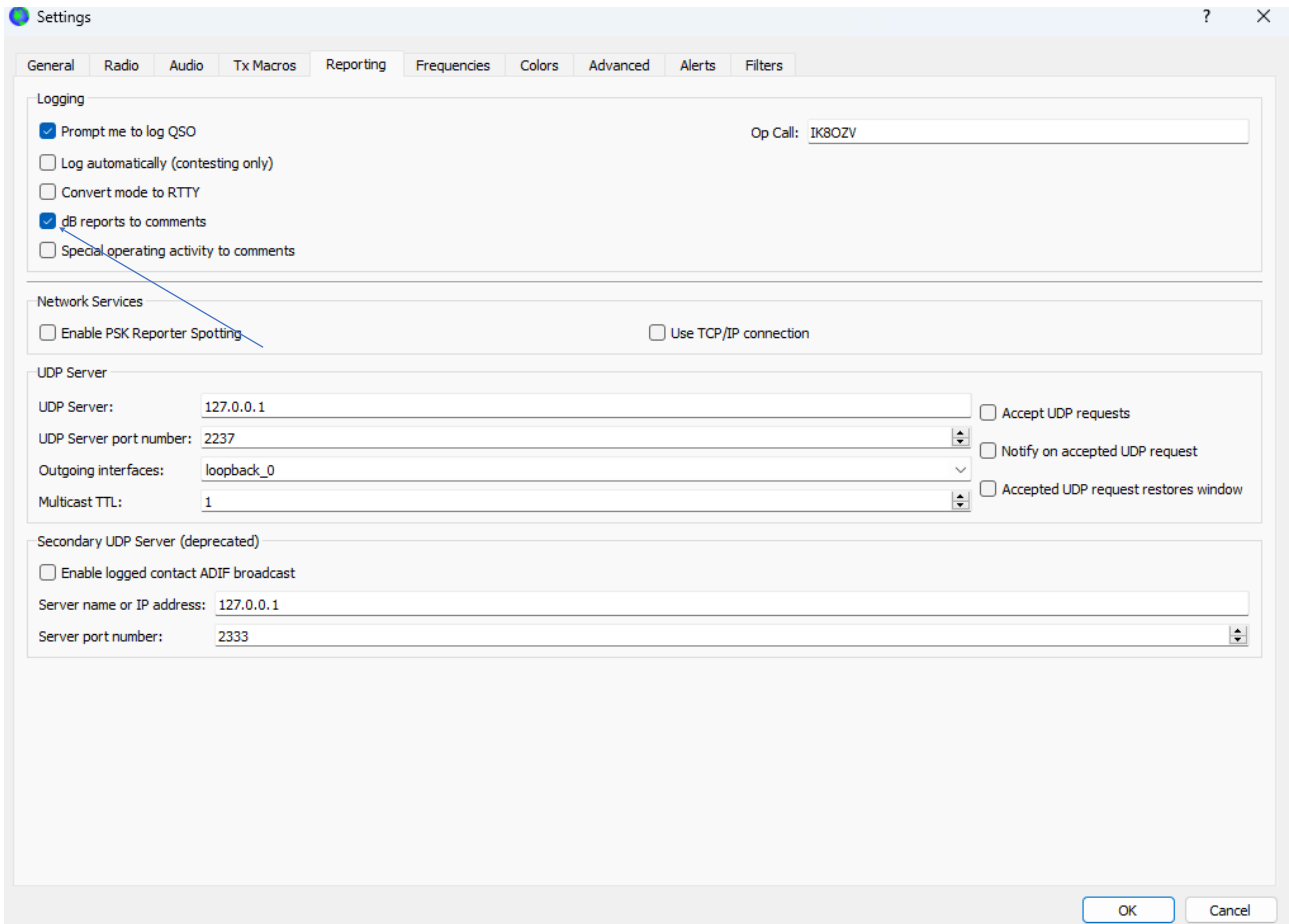


Now go to the bottom and enable the UDP Server by ticking this box:

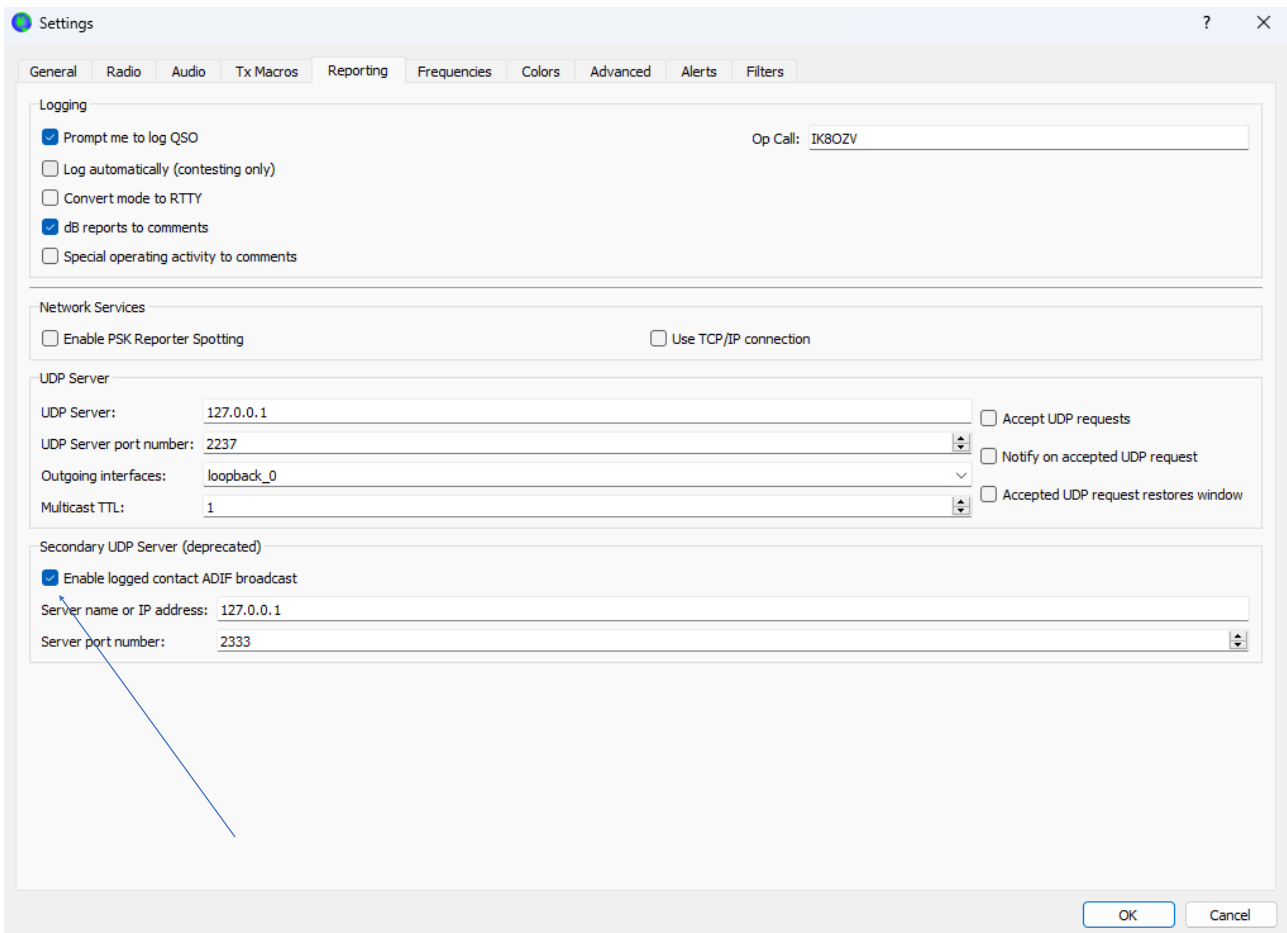

Leave the "Server Name or IP Address" field set to 127.0.0.1

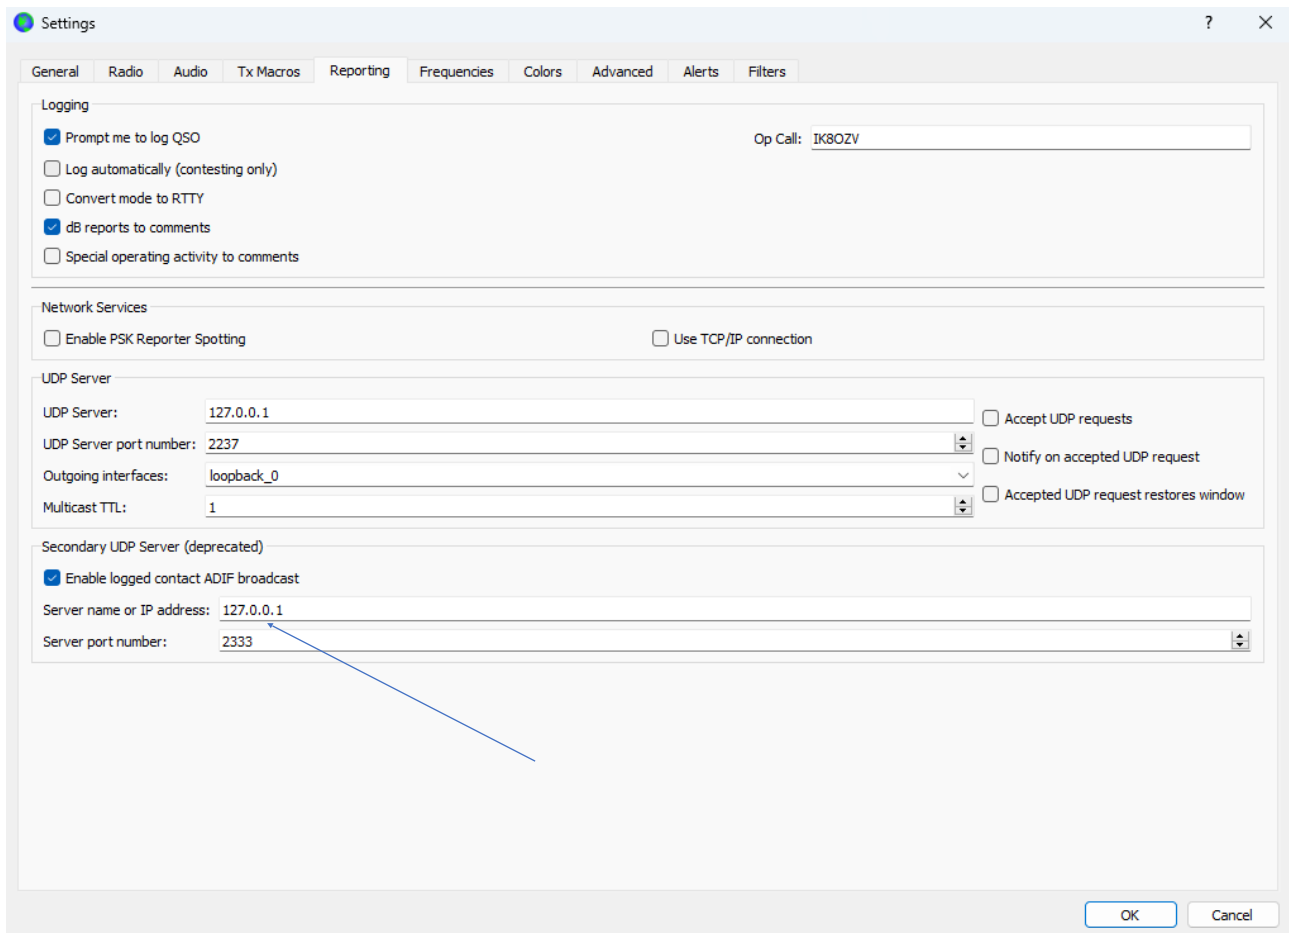

And set the door if not already set like this on 2333:

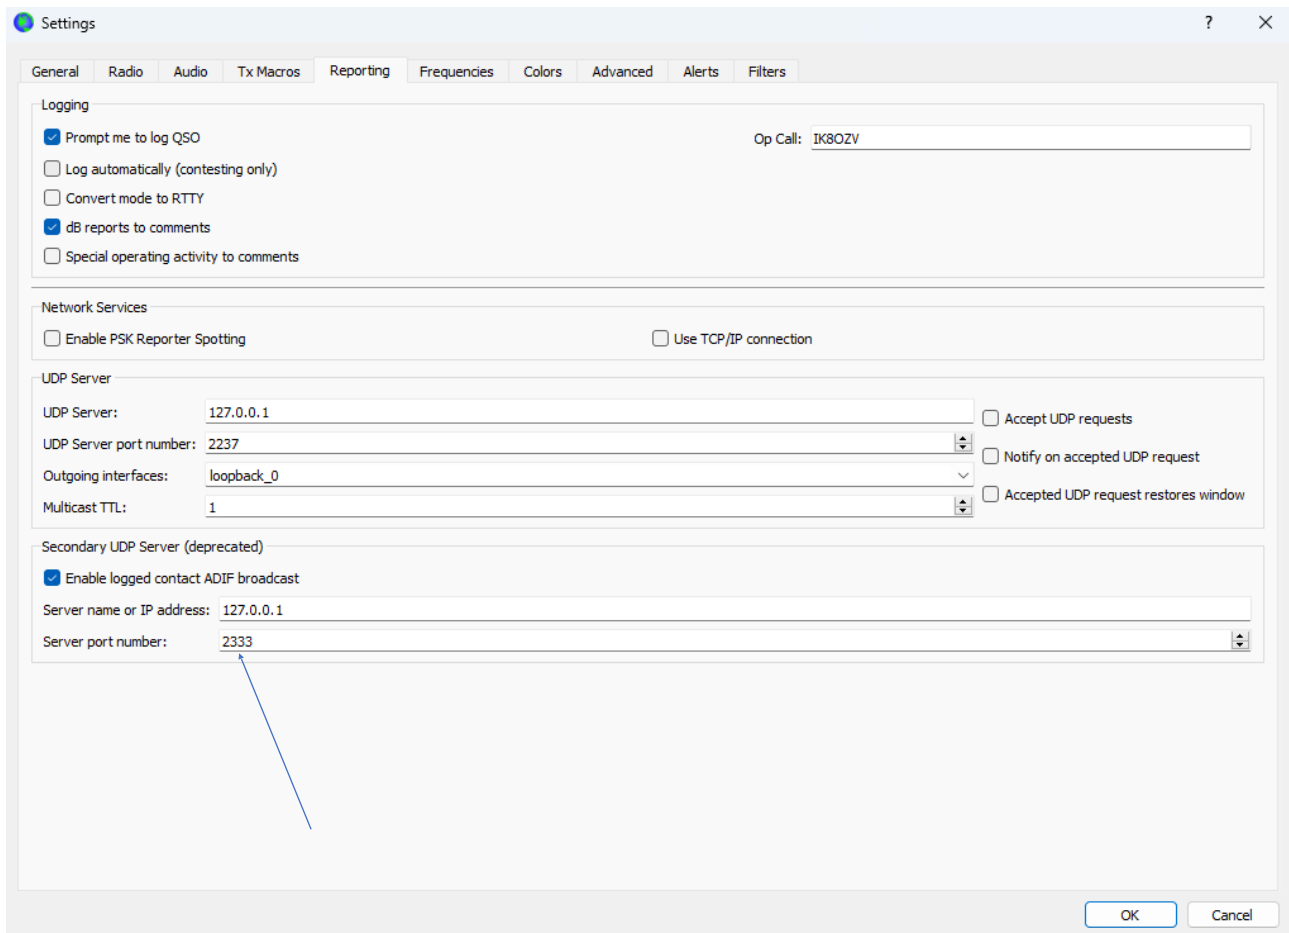

Give OK and you're done.